


TOP VIEW


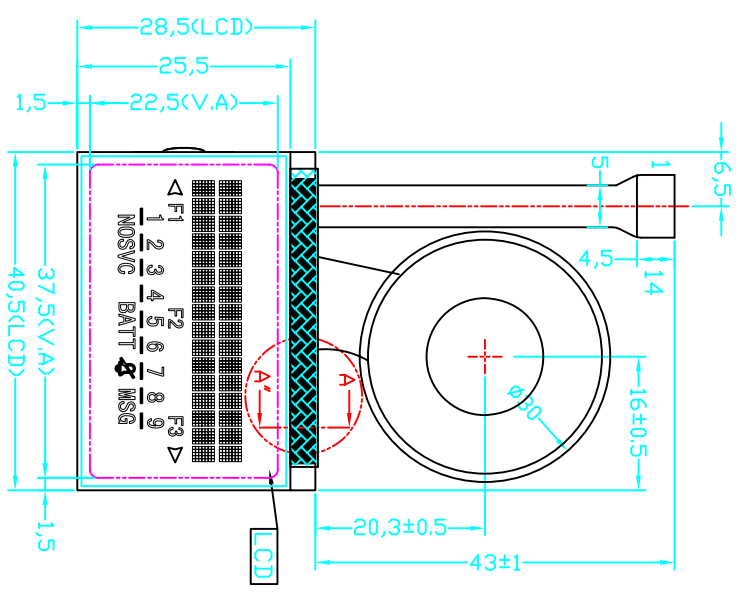


PIN NO.	1	2	3	4	5	6	7	8	9	10	11	12	13	14
SYMBOL	VDD	NC	SA	RS	R/W	E	D4	D5	D6	NC	D7	SK	NC	VSS

NOTES:


1. DISPLAY TYPE:
2. VIEWING DIRECTION:
3. DRIVE METHDD:
4. OPERTING TEMPERATURE:
5. STORAGE TEMPERATURE:
6. DRIVER IC:

BOTTOM VIEW

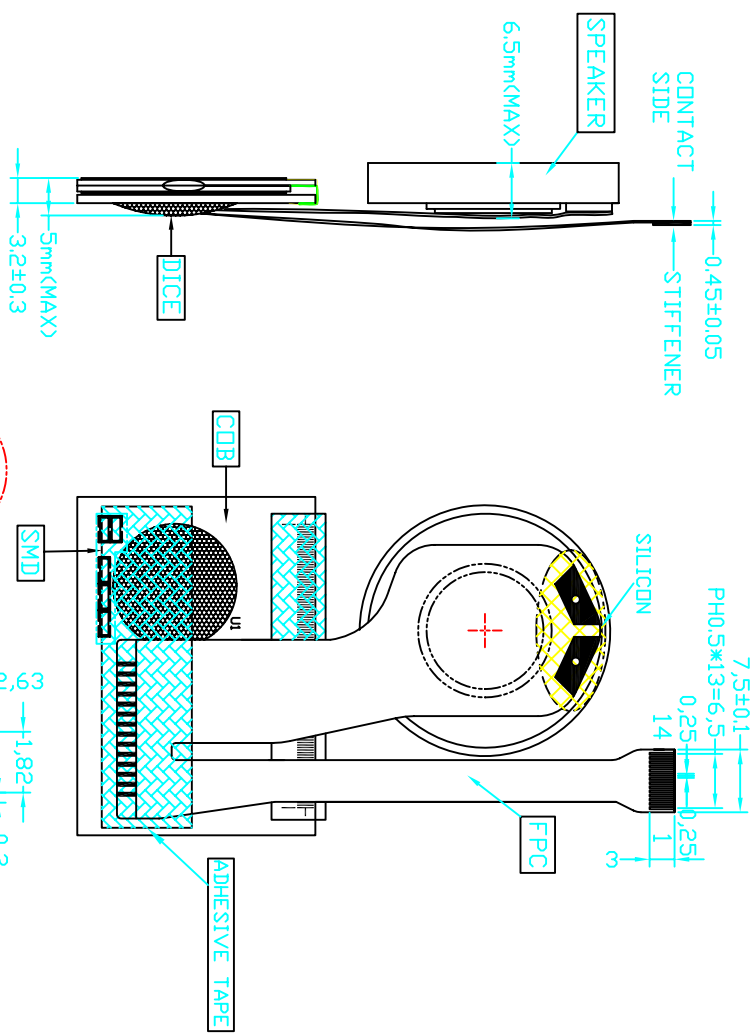

SECTION A-A'
SCALE 2:1

DOT DETAIL
SCALE 4:1



1. DISPLAY TYPE: STN, POSITIVE, REFLECTIVE, GRAY
2. VIEWING DIRECTION: 60° CLOCK
3. DRIVE METHDD: 1/33 DUTY, 1/5 BIAS, VOP: 5V, VDD: 4.2V
4. OPERTING TEMPERATURE: -20°C ~ 70°C
5. STORAGE TEMPERATURE: -30°C ~ 80°C
6. DRIVER IC: KS0073 & EQV

GENERAL TOLERANCE: DIMENSION - 1/2 4.0/16 ANGULAR - ±1/2°		DO NOT SCALE DRAWING		STYLE:	
DATE:	DATE:	DATE:	DATE:	DATE:	DATE:
YAN:Q	ON:SER:18	MODEL:	1602	FILE NO.:	REV:
1/1 OR NOTED	APPRD:	DATE:	REFER NOTE	DATE:	1,2
ALL DIMENSIONS ARE IN METRIC UNLESS OTHERWISE SPECIFIED		MATERIAL:		FINISH:	
SCALE:		REFER NOTE		REFER NOTE	
SCALE:		SH 1 0° 1		A2	